



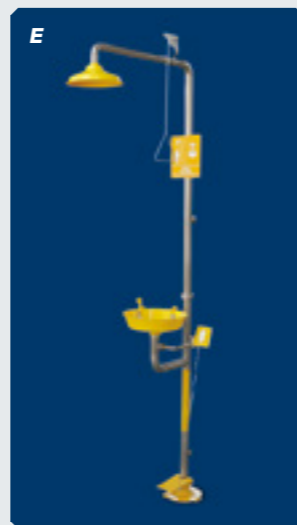

## Portable Eye Wash Stations

IMAGE	CODE	DESCRIPTION	MATERIAL	STANDARD	CAPACITY	WEIGHT	DIMENSIONS
<b>FLAMMABLE CABINETS</b>							
A	WG6000B	Portable Eye Wash Station	Polyethylene 490 x 290 x 600mm	ANSI Z358.1-2009	60L	8.6kg	735 x 420 x 416mm
B	WG6001B	Portable Eye Wash With Cart	Polyethylene	ANSI Z358.1-2009	60L	32.6kg	-
C	WG7021K	Wall Mounted Eyewash	Stainless Steel	ANSI Z358.1-2009	-	5kg	410 x 210 x 100mm
C	WG7022		Stainless Steel Spray Head + ABS Bower	ANSI Z358.1-2009	-	5kg	410 x 210 x 100mm
D	WG7031K	Pedestal Mounted Eyewash	Stainless Steel + Galvanised Steel Pipe	ANSI Z358.1-2009	-	7kg	880 x 190 x 330mm
D	WG7032K		Stainless Steel	ANSI Z358.1-2009	-	7kg	880 x 190 x 330mm
E	WG7051K	Eyewash/ Shower Station	Stainless Steel + Galvanised Steel Pipe	ANSI Z358.1-2009	-	12kg	660 x 350 x 310mm
E	WG7052K		Stainless Steel	ANSI Z358.1-2009	-	12kg	660 x 350 x 310mm

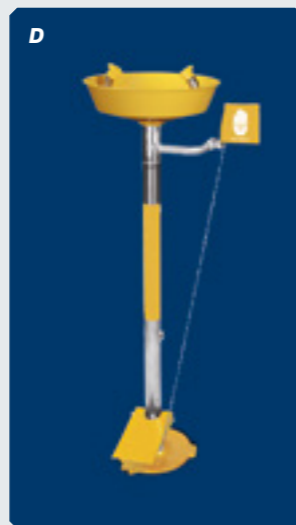

### PORTABLE EYE WASH STATION WG6003Y

Ideal for workplaces without water supply and discharge facilities, it can be easily installed and fixed onto walls as required to provide timely and professional protection. Complies with the regulations of F.D.A on the grade on PE materials for food (F.D.A regulation on polypropylene: the requirements of U.S 21 CFR F.D.A Regulation Part 177.1520. High intensity, good toughness, good rigidity, and heat and cold resistance. Complies with regulations of ANSI/ISES on emergency eye wash station and showering equipment-ANSI Z358.1-2012. For best results, discharge liquid and clean every component of eye wash station every two weeks.

#### Specifications

- Wall-mounted backing plate included.
- Dimension: 64x47x27.5 (HxWxD/cm)
- Water tank height: 59.5cm (without sealing cover)
- Capacity: 60L
- Flow rate: delivers 52L of water in 15 minutes. (3.5 Litres per minute)
- Portable eye wash station package:
- Carton dimension: 67x50x32 (HxLxW/cm)
- Gross weight 8.5Kg
- Weight filled with water 65.8Kg.

### WG6004Y WITH CART AND WASTEWATER COLLECTION BARREL

For workplaces without water supply and discharge facilities and without installation requirements. Equipped to facilitate and rapid and convenient mobility for professional emergency protection. Consists of WG6003Y and cart with wastewater collection barrel. Uses gravity to produce water pressure and deliver to two nozzles for eye washing. Can also be installed and fixed onto wall.

#### Specifications

- Wall-mounted backing plate as well as cart and wastewater collection barrel.
- Dimension: 64x47x27.5 (HxWxD/cm)
- Water tank height: 59.5cm (without sealing cover)
- Cart height: 157cm.
- Belt pulley: 62x77x44 (HxWxD/cm)
- Wastewater collection barrel:
- Upper diameter: 50.5cm, lower diameter: 40cm
- Height: 61.5cm.
- Capacity: 60L.
- Flow rate: delivers 52L gallons of water in 15min (3.5Litres per min)
- Portable eye wash station package:
- Carton dimension : 67x50x32 (HxWxD/cm).
- Cart weight: 18.5Kg.
- Weight of wastewater collection barrel: 2.8Kg.
- Gross weight of eye wash station: 8.5Kg.
- Weight filled with water approx.: 65.8Kg.

